

ES5A-ES5J

5.0Amp Surface Mount Super Fast Rectifiers

Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Super fast speed switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds at terminals

Mechanical Data


Case: JEDEC DO-214AB molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight : 0.007 ounce, 0.25 grams

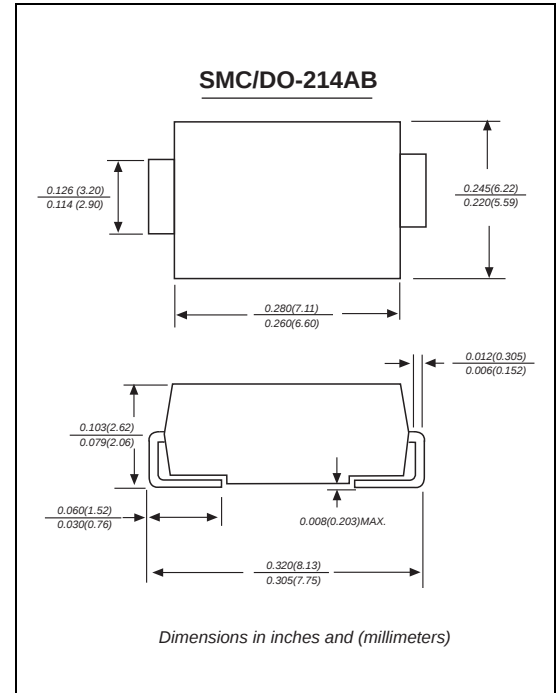

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	ES5A	ES5B	ES5C	ES5D	ES5E	ES5G	ES5J	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	300	400	600	VOLTS
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	VOLTS
Maximum DC blocking voltage	V _{DC}	50	100	150	200	300	400	600	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length at T _A =55°C	I _(AV)	5.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150.0							Amps
Maximum instantaneous forward voltage at 5.0A	V _F	0.95				1.25		1.7	Volts
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	10.0 50.0							µA
Maximum reverse recovery time (NOTE 1)	t _{rr}	35							ns
Typical junction capacitance (NOTE 2)	C _J	100.0				50.0			pF
Typical thermal resistance (NOTE 3)	R _{θJA}	30.0							°C/W
Operating junction and storage temperature range	T _J ,T _{STG}	-65 to +150							°C

Note: 1. Reverse recovery condition $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

Ratings And Characteristic Curves

ES5A THRU ES5J

FIG. 1- FORWARD CURRENT DERATING CURVE

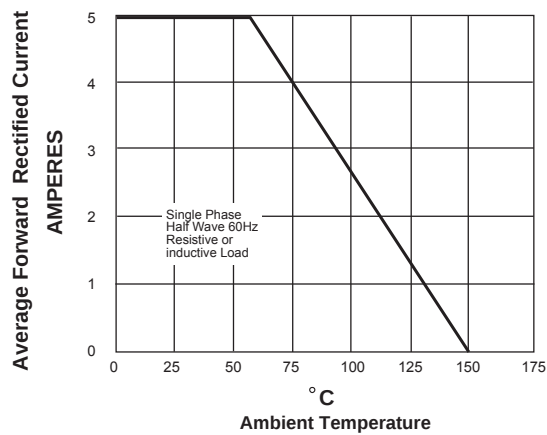


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

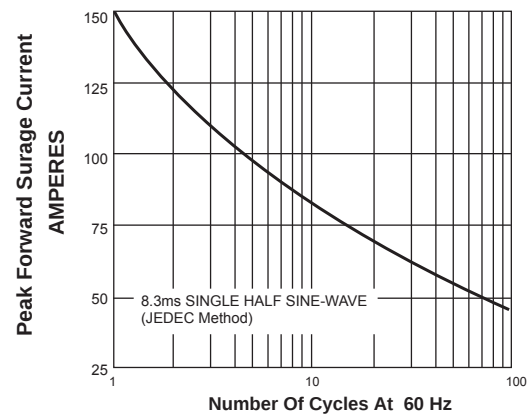


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

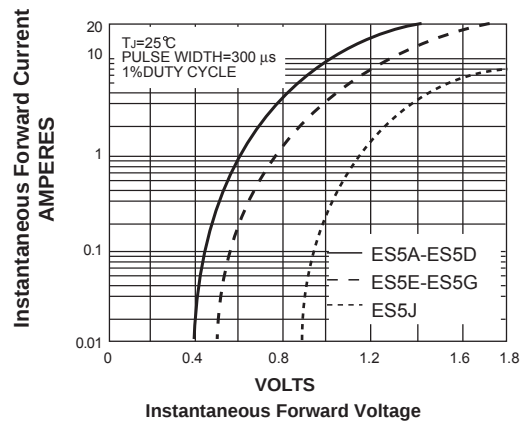


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

