

## 1H1~1H8 1.0Amp High Efficiency Rectifiers

### Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- High speed switching for high efficiency
- Open-Junction chip ,silastic passivated
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
250°C/10 seconds,0.375"(9.5mm) lead length,  
5 lbs. (2.3kg) tension

### Mechanical Data


Case: R-1 molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight : 0.007 ounce, 0.20grams

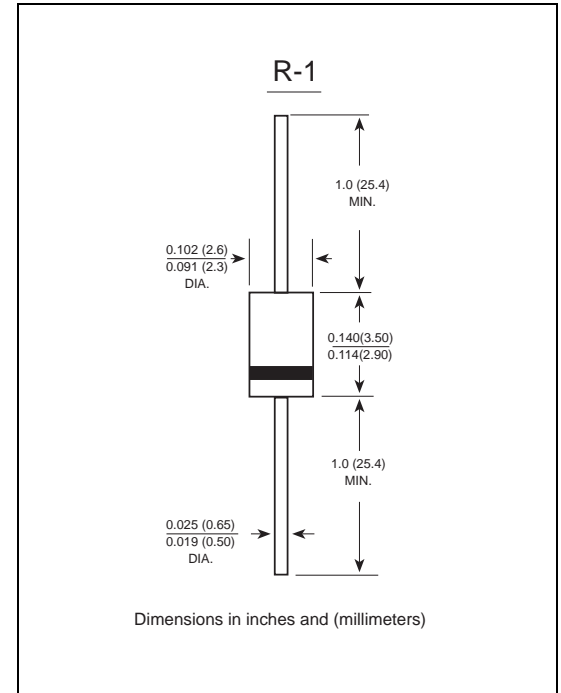

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz,resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	1H1	1H2	1H3	1H4	1H5	1H6	1H7	1H8	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	300	400	600	800	1000	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	210	280	420	560	700	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	300	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length at T <sub>A</sub> =25°C	I <sub>(AV)</sub>	1.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	25.0								Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.0			1.3		1.70			Volts
Maximum DC reverse current     T <sub>A</sub> =25°C at rated DC blocking voltage    T <sub>A</sub> =100°C	I <sub>R</sub>	5.0 100.0								µA
Maximum reverse recovery time   (NOTE 1)	t <sub>rr</sub>	50					70			ns
Typical junction capacitance (NOTE 2)	C <sub>J</sub>	15.0					12.0			pF
Typical thermal resistance (NOTE 3)	R <sub>θJA</sub>	50.0								°C/W
Operating junction and storage temperature range	T <sub>J</sub> ,T <sub>STG</sub>	-65 to +150								°C

Note:1.Reverse recovery time test condition:  $I_F=0.5A$   $I_R=1.0A$   $I_{rr}=0.25A$

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.Thermal resistance from junction to ambient at 0.375 "(9.5mm)lead length,P.C.B. mounted