


2.0W Surface Mount Zener Diodes

Features

- P_d 2.0W
- V_z 3.3V-330V

Mechanical Data

Case : Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.0023 ounce, 0.07 grams

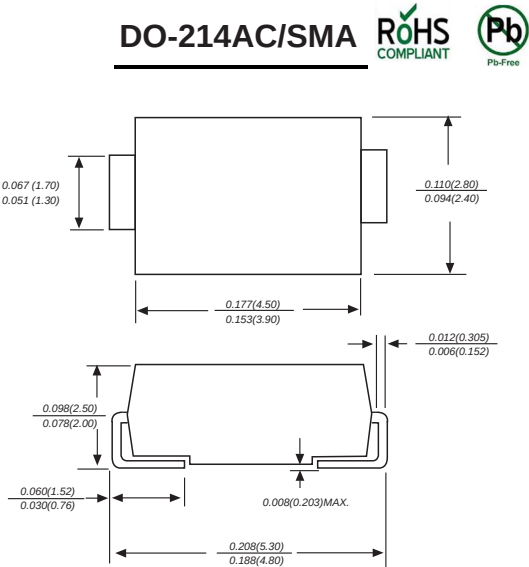

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Characteristic	Symbol	Value	Unit
Power Dissipation at $T_L = 60^{\circ}\text{C}$ (Note 1)	P_d	2.0	W
Forward Voltage @ $I_F = 200\text{mA}$	V_F	1.2	V
Thermal Resistance, Junction to Ambient (Note 2) Thermal Resistance, Junction to Lead (Note 1)	$R_{\theta JA}$ $R_{\theta JL}$	250 50	$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150	$^{\circ}\text{C}$

Note: 1. Mounted on FR-4 PCB with 25.4 x 25.4mm copper pads.
2. Mounted on ceramic substrate with minimum recommended pad layout.

2.0W Surface Mount Zener Diodes

Type Number (Note 1)	Device Marking Code	Nominal Zener Voltage (Note 2)	Test Current	Maximum Zener Impedance (Note 3)			Maximum Leakage Current		Max DC Zener Current
		V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R		I _{ZM}
		(V)	(mA)	(Ω)	(Ω)	(mA)	(μA)	(V)	(mA)
1SMA2EZ2.7D5	2H0	2.7	180.0	10.0	400	1.00	100	1.0	670
1SMA2EZ3.0D5	2H1	3.0	160.0	8.0	400	1.00	100	1.0	603
1SMA2EZ3.3D5	2H2	3.3	145.0	8.0	400	1.00	80	1.0	548
1SMA2EZ3.6D5	2H3	3.6	139.0	5.0	400	1.00	80	1.0	504
1SMA2EZ3.9D5	2H4	3.9	128.0	5.0	400	1.00	30	1.0	468
1SMA2EZ4.3D5	2H5	4.3	116.0	4.5	400	1.00	20	1.0	434
1SMA2EZ4.7D5	2H6	4.7	106.0	4.5	550	1.00	5.0	1.0	386
1SMA2EZ5.1D5	2H7	5.1	98.0	3.5	600	1.00	5.0	1.0	356
1SMA2EZ5.6D5	2H8	5.6	89.5	2.5	500	1.00	5.0	2.0	324
1SMA2EZ6.2D5	2A0	6.2	80.5	1.5	700	1.00	5.0	3.0	292
1SMA2EZ6.8D5	2A1	6.8	73.5	2.0	700	1.00	5.0	4.0	266
1SMA2EZ7.5D5	2A2	7.5	66.5	2.0	700	0.50	5.0	5.0	242
1SMA2EZ8.2D5	2A3	8.2	61.0	2.3	700	0.50	5.0	6.0	220
1SMA2EZ9.1D5	2A4	9.1	55.0	2.5	700	0.50	3.0	7.0	200
1SMA2EZ10D5	2A5	10	50.0	3.5	700	0.25	3.0	7.6	182
1SMA2EZ11D5	2A6	11	45.5	4.0	700	0.25	1.0	8.4	166
1SMA2EZ12D5	2A7	12	41.5	4.5	700	0.25	1.0	9.1	152
1SMA2EZ13D5	2A8	13	38.5	5.0	700	0.25	0.5	9.9	138
1SMA2EZ14D5	2A9	14	35.7	5.5	700	0.25	0.5	10.6	130
1SMA2EZ15D5	2B0	15	33.4	7.0	700	0.25	0.5	11.4	122
1SMA2EZ16D5	2B1	16	31.2	8.0	700	0.25	0.5	12.2	114
1SMA2EZ17D5	2B2	17	29.4	9.0	750	0.25	0.5	13.0	107
1SMA2EZ18D5	2B3	18	27.8	10.0	750	0.25	0.5	13.7	100
1SMA2EZ19D5	2B4	19	26.3	11.0	750	0.25	0.5	14.4	95
1SMA2EZ20D5	2B5	20	25.0	11.0	750	0.25	0.5	15.2	90
1SMA2EZ22D5	2B6	22	22.8	12.0	750	0.25	0.5	16.7	82
1SMA2EZ24D5	2B7	24	20.8	13.0	750	0.25	0.5	18.2	76
1SMA2EZ27D5	2B8	27	18.5	18.0	750	0.25	0.5	20.6	68
1SMA2EZ30D5	2B9	30	16.6	20.0	1000	0.25	0.5	22.5	60
1SMA2EZ33D5	2C0	33	15.1	23.0	1000	0.25	0.5	25.1	55
1SMA2EZ36D5	2C1	36	13.9	25.0	1000	0.25	0.5	27.4	50
1SMA2EZ39D5	2C2	39	12.8	30.0	1000	0.25	0.5	29.7	47
1SMA2EZ43D5	2C3	43	11.6	35.0	1500	0.25	0.5	32.7	43
1SMA2EZ47D5	2C4	47	10.6	40.0	1500	0.25	0.5	35.8	39
1SMA2EZ51D5	2C5	51	9.8	48.0	1500	0.25	0.5	38.8	36
1SMA2EZ56D5	2C6	56	9.0	55.0	2000	0.25	0.5	42.6	32
1SMA2EZ62D5	2C7	62	8.1	60.0	2000	0.25	0.5	47.1	29
1SMA2EZ68D5	2C8	68	7.4	75.0	2000	0.25	0.5	51.7	27
1SMA2EZ75D5	2C9	75	6.7	90.0	2000	0.25	0.5	56.0	24
1SMA2EZ82D5	2F0	82	6.1	100.0	3000	0.25	0.5	62.2	22

- Note: 1. Type numbers listed have standard tolerance on the nominal zener voltage of ±5%.
2. Measured under thermal equilibrium and DC (I_{ZT}) test conditions.
3. The Zener impedance is derived from the 60Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.







2.0W Surface Mount Zener Diodes

Type Number (Note 1)	Device Marking Code	Nominal Zener Voltage (Note 2)	Test Current	Maximum Zener Impedance (Note 3)			Maximum Leakage Current		Max DC Zener Current
		V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R		I _{ZM}
		(V)	(mA)	(Ω)	(Ω)	(mA)	(μA)	(V)	(mA)
1SMA2EZ91D5	2F1	91	5.5	125.0	3000	0.25	0.5	69.2	20
1SMA2EZ100D5	2F2	100	5.0	175.0	3000	0.25	0.5	76.0	18
1SMA2EZ110D5	2F3	110	4.5	250.0	4000	0.25	0.5	83.6	17
1SMA2EZ120D5	2F4	120	4.2	325.0	4500	0.25	0.5	91.2	15
1SMA2EZ130D5	2F5	130	3.8	400.0	5000	0.25	0.5	98.8	14
1SMA2EZ140D5	2F6	140	3.6	500.0	5500	0.25	0.5	106.4	13
1SMA2EZ150D5	2F7	150	3.3	575.0	6000	0.25	0.5	114.0	12
1SMA2EZ160D5	2F8	160	3.1	650.0	6500	0.25	0.5	121.6	11
1SMA2EZ170D5	2F9	170	2.9	675.0	7000	0.25	0.5	130.4	11
1SMA2EZ180D5	2G1	180	2.8	725.0	7000	0.25	0.5	136.8	10
1SMA2EZ190D5	2G2	190	2.6	825.0	8000	0.25	0.5	144.8	10
1SMA2EZ200D5	2G3	200	2.5	900.0	8000	0.25	0.5	152.0	9.0
1SMA2EZ220D5	2G4	220	2.0	2000.0	8500	0.25	0.5	167.0	8.0
1SMA2EZ270D5	2G5	270	1.6	2200.0	8500	0.25	0.5	205.0	6.7
1SMA2EZ300D5	2G6	300	1.5	2200.0	9000	0.25	0.5	228.0	5.9
1SMA2EZ330D5	2G7	330	1.4	2300.0	9000	0.25	0.5	250.0	5.4

- Note: 1. Type numbers listed have standard tolerance on the nominal zener voltage of ±5%.
2. Measured under thermal equilibrium and DC (I_{ZT}) test conditions.
3. The Zener impedance is derived from the 60Hz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK}. Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.


2.0W Surface Mount Zener Diodes

Ratings And Characteristic Curves

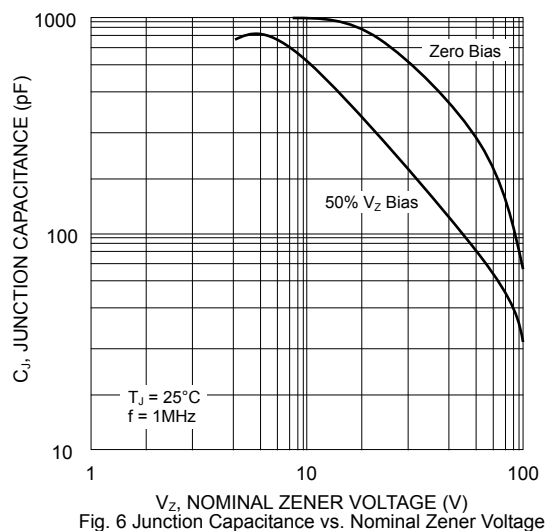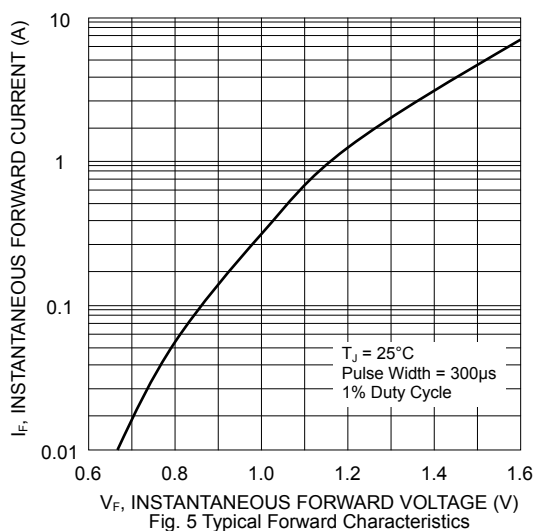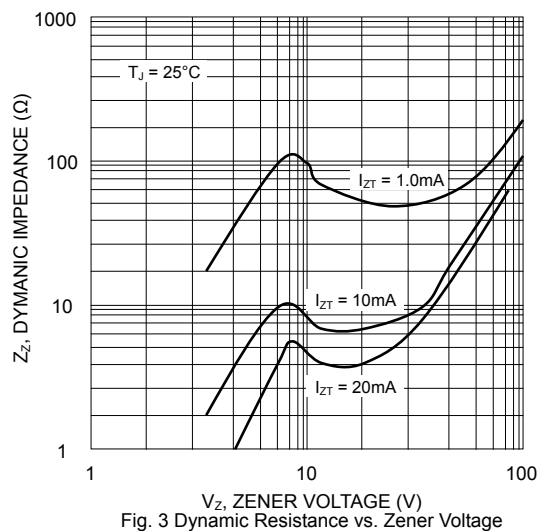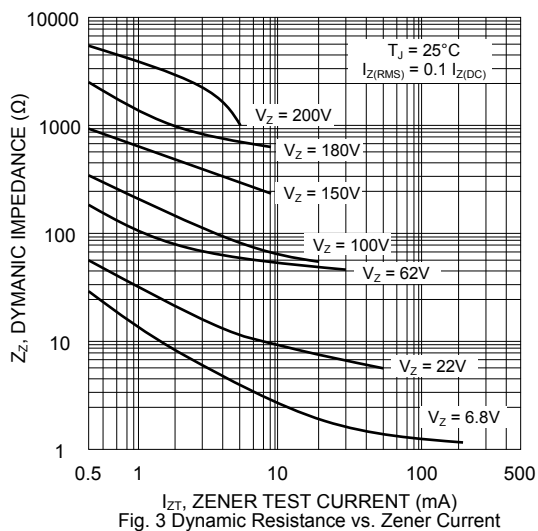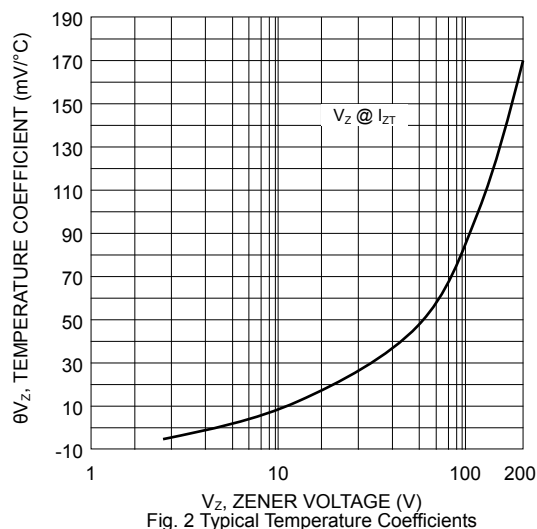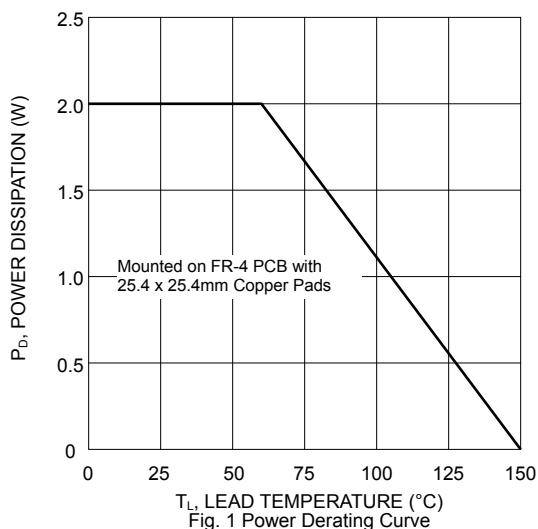


2.0W Surface Mount Zener Diodes

Suggested Pad Layout

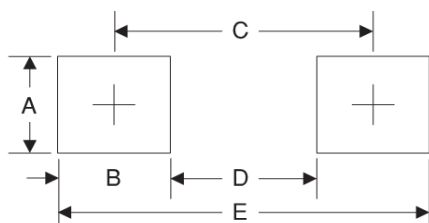

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.90	0.154
D	2.41	0.095
E	5.45	0.215

Suggested Soldering Temperature Profile

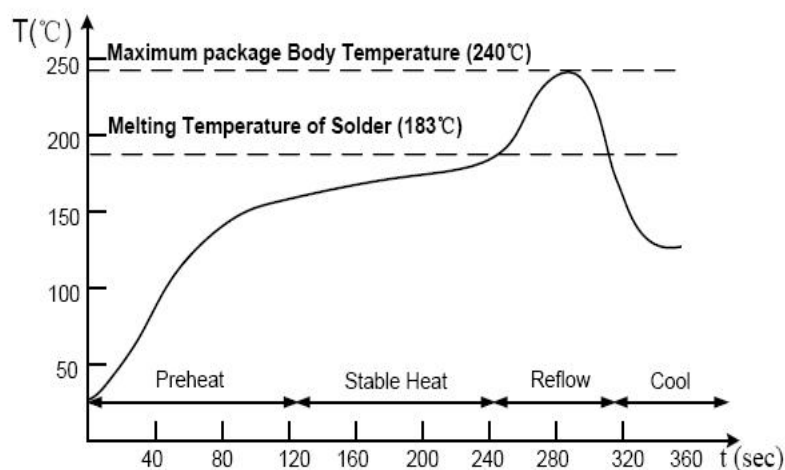


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 265°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)

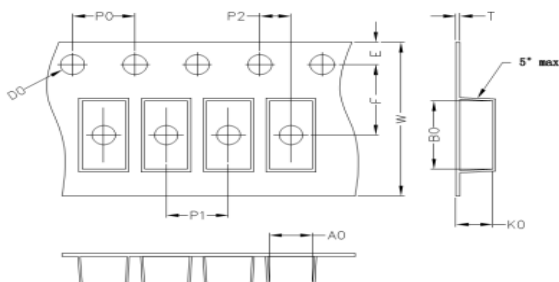

A0	B0	K0	D0	E	F
2.80	5.30	2.36	1.55	1.75	5.50
P0	P1	P2	T	W	Tolerance
4.0	4.0	2.0	0.25	12	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SMA	11'	278	5	285	10	355*310*310	80
	13'	330	7.5	340	15	360*360*360	120